

# NORTHFIELD CORPORATION

O.E.M. OF NORTHFIELD CONTINUOUS FEED COUPON INSERTERS

Service • Installation • Labelers • Inserters

## FastPaQ model UHS

The FastPaQ UHS (ultra high speed) labeler is capable of dispensing labels at 375m/min (15,000"/min). Depending on label length the UHS labeler can accurately apply labels to products at a rate of over 3,000 per minute or 200,000 per hour.

The UHS labeler has been designed from the outset with flexibility and ease of use in mind and its extensive features and compact, modular design make it suitable for a wide variety of high-speed applications. Explore our site to find out more.




### Featuring:

- Complete parts inventory on all equipment
- 9 service technicians available 24 hours a day, 7 days a week.
- 80 + years combined experience nationwide with numerous companies, both large and small
- In-field consultation

*Dedicated to efficient installation, training, service and sales of coupon inserting equipment and pressure sensitive label applicators.*

# FASTPAQ MODEL UHS

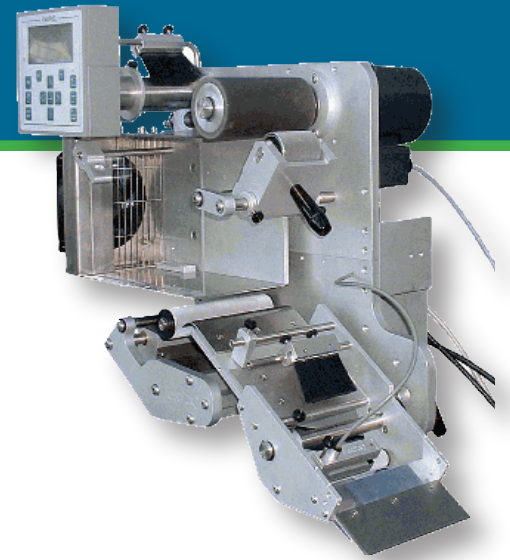

## Standard specifications

Maximum label width: 4.5" (115mm)  
Maximum label length: 20" (500mm)  
Maximum dispense speed: 15,000"/min (375m/min)  
Maximum line speed: 15,000"/min (375/min)  
Labelling accuracy: Up to +/- 1/32" (+/-0.4mm)  
Single remotable keypad/display unit  
Dimensions: Stand-alone loop unit L 460mm (18") H 300mm (12") approx  
Stand-alone dispense unit L 460mm (18") H 200mm (8") approx  
Labeler with units combined L 510 (20") H 510mm (20") approx  
Power supply: Single phase 120V or 240V +/- 15%.  
Operating temperature: 5°C - 50°C  
Maximum humidity: 85% (non-condensing)  
IP rating: 20

## Options

Unwind unit (with automatic low-label detection)  
Rewind unit  
Product shape speed profiling  
Maximum label width: 10" (250mm)  
Maximum label length: Can be specified by customer  
Maximum line speed: 40,000"/min (1km/min)  
Additional remotable keypad/display units

Serial communication interfaces including RS232 and RS485 for monitoring/control of labeler and/or external devices

I/O for interfacing to PLCs, controlling status lamps, monitoring/control of external devices etc.

Bespoke software for control/monitoring of other devices such as reject units, barcode readers etc.

IP rating: 55 (wash-down)

Label Placement: +/- 1/32"

*Note: Performance rates based on compliance with label specifications as described above as well as all machine performance safe guards in place. Operators must be fully trained and take complete ownership of equipment.*

## In Shop Warranty:

The Model UHS has a 12-month warranty on non-wear parts, a six month warranty on wear parts and a 90 day warranty on in-feed/nip rollers.

*Distributed by:*

## **NORTHFIELD CORPORATION**

1870 Commerce Drive • De Pere, WI 54115

920-983-8122 • Fax 920-983-8124

[www.northfieldcorp.com](http://www.northfieldcorp.com)